

## ECP32Q

### EasyLED Reveal Large Round Canopy



The LEPG CP32Q Reveal Architectural Large Round Canopy is available in Type III or V distributions with two lens options designed to replace HID lighting systems up to 1000w MH or HPS. Typical area lighting applications include retail centers, industrial parks, schools and universities, public transport and airports, office buildings and medical facilities. Mounting heights of 12 to 30 feet can be used based on light level and uniformity requirements.

#### Specifications and Features:

**Housing:** Die Cast Aluminum Housing, Integral Heat Sinking.

#### Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP65  
Finish: Black Powdercoat Finish Over a Chromate Conversion Coating.  
Custom Colors Available Upon Request.

Lens: Clear Polycarbonate or SoftLED LumaLens Opal Polycarbonate  
Vandal-Resistant Array Lens to Seal LED Array

#### Mounting Options:

Included Easy-Hang Bracket Fits Standard 4" Electrical Box, Allowing One Person Installation. EasyLED LED: Aluminum Boards

#### Wattage:

100w Array: 100w, System: 108w; (150-250w HID Equivalent)

176w Array: 176w, System: 190w; (400-1000w HID Equivalent)

**Driver:** Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV.

0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.


**Controls:** Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPG Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

**Warranty:** 5-Year Warranty for -40°C to +50°C Environment.

#### Dimensions

**Diameter (D)** | 26 3/4" (679mm)

**Height (A)** | 6" (152mm)

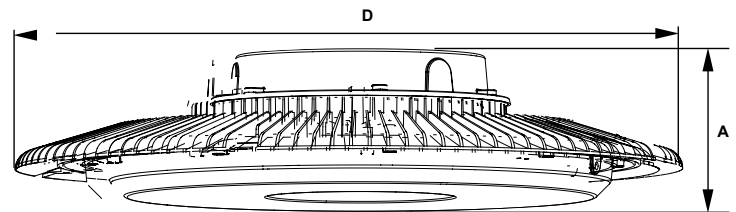

#### Order Information:

Model	Optics	Wattage	Driver	CCT	Color	Height	Options
CP32Q= Easy LED Reveal Large Round Canopy	C=Type III F= Type V	1X100=100w 1x176 = 176w	U=120-277V H=347-480V	3K=3000K* 4K=4000K 5K=5000K+ *176w Type V Only +176w Type III Coming Soon	C=Clear Polycarbonate Array Lens L=SoftLED LumaLens Opal Polycarbonate Array Lens	B=Black C=Custom (Consult Factory)	SF=Single Fuse DF=Double Fuse SP=Surge Protection S2=Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. (120-277V Only)

**Accessories & Replacement Parts:**



P17117

**Accessories**  
(Order Separately, Field Installed)


AS322S\* Spun Aluminum Shade with Powdercoat Finish,  
Hardware Included

\*Specify Color: B=Black, C=Custom (Consult Factory)


**Replacement Parts**  
(Order Separately, Field Installed)

P17117 Internal Microwave Sensor with Dimming for  
Mounting Heights of 8 to 40'. 120-277VAC,  
50/60Hz

**Photometric Data**

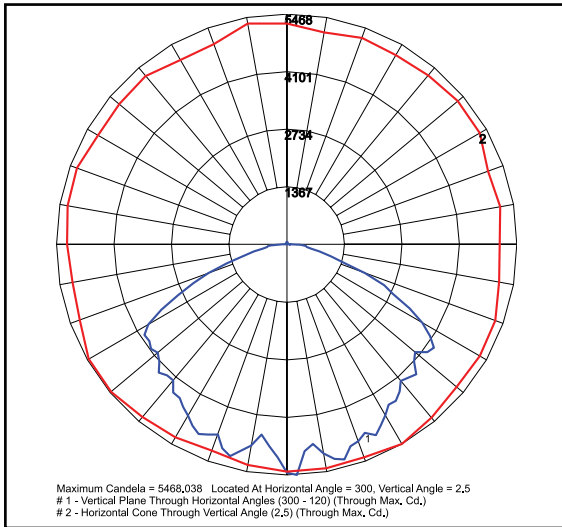

CP32QF1X176U5KC -  
Clear Prismatic Lens

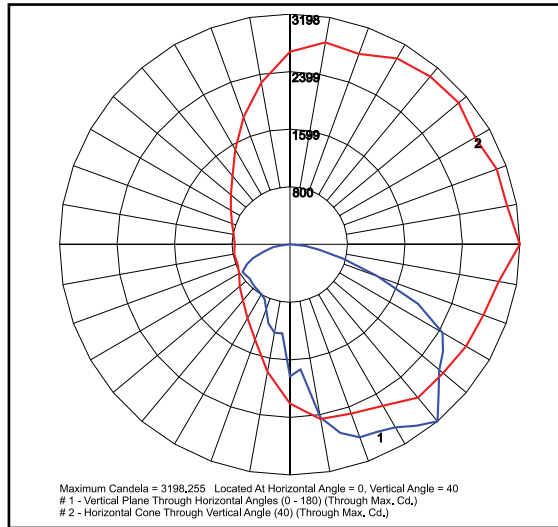

CP32QC1X100U5KC -  
Clear Prismatic Lens

**Photometric Performance**

LED Board Watts	Drive Current (mA)	Input Watts	Optics	Spacing Criteria	5000 CCT 80 CRI		4000 CCT 80 CRI	
					Lumens	LPW	Lumens	LPW
EasyLED 100w	525	108	Type III Clear	2.14	9,073	84	8,733	81
EasyLED 176w		190	Type III Clear	2.14	15,969	84	15,370	81
			Type V Clear	1.24	17,360	91	16,188	85

**Projected Lumen Maintenance**

Data shown for 5000 CCT			Compare to MH				
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C	
L70 Lumen Maintenance @ 25°C / 77°F	190	1.00	0.98	0.96	0.92	362,000	
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C	
L70 Lumen Maintenance @ 50°C / 122°F	190	1.00	0.96	0.92	0.84	183,000	
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C	
L80 Lumen Maintenance @ 40°C / 104°F	190	1.00	0.97	0.94	0.88	167,000	