

Job Name: _____
 Type: _____
 Part #: _____
 Notes: _____

EX

Thermoplastic Exit Sign



Custom Signage Available

Illumination

- Ultra bright, energy efficient, long life Red or Green LEDs.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- Custom: Signs available with requested 'special' wording.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- cUL: Units tested to meet requirements of CAN/CSA-c22.2 No. 141-02 standard for unit equipment.

Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.


Warranty/ Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.
- Compact, low-profile design.

Dimensions

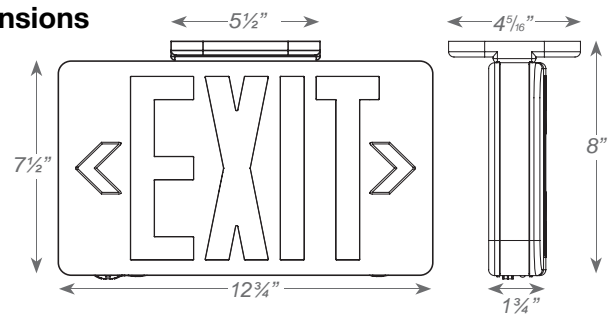

Ordering Information

* Special voltage & SALIDA face plate options available
 1 Available only with EM units.
 2 Available only with AC units.

Product Number:	EX	NF:	LC:	HC:	B:	O:					
Model	EX	No. of Faces	2	Letter Color	R Red G Green	Housing Color	W White B Black	Battery	(blank) AC-Only EM Battery Backup	Options	SDT Self-Diagnostics ¹ 2C Dual Circuit Operation ² Custom Custom Wording USA Assembled In USA cUL cUL Listed
08.2019											