

EXDC

Die-Cast Aluminum Exit Sign



Illumination

- Ultra bright, energy efficient, long life Red or Green LEDs.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

Mounting

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.


Warranty/ Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

Housing

- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field. • Quick-snap face plate closure.

Dimensions

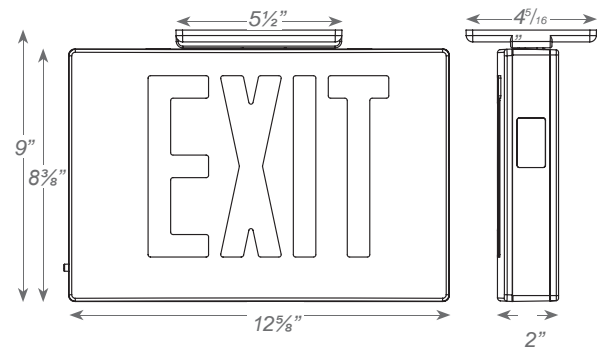

Ordering Information

* Special voltage options available.
 1 Available only with EM units.
 2 Available only with AC units.

Product Number: EXDC

NF:

LC:

HC:

FP:

B:

O:

Model	No. of Faces	Letter Color	Housing Color	Face Panel	Battery	Options
EXDC	1	Single Face	R Red	W White	W White	SDT Self-Diagnostics ¹ 2C Dual Circuit Operation ² TP Tamper-Proof USA Assembled In USA
	2	Double Face	G Green	B Black	B Black	
	3	Universal Single/Double Face		A Aluminum	A Aluminum	
					(blank) AC-Only EM Battery Backup	

08.2019