

EFE SERIES

NON-METALLIC OUTDOOR LIGHTING




Available in LED & GU24


Molded of Durable Non-Corrosive UV Resistant Resins with Powder Coated Aluminum Base

Wall Mount Only
UL Listed for Wet Locations
Standard Pack QTY: 6

EFE112

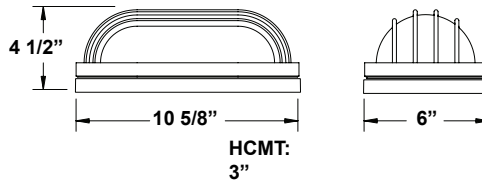

EFE114

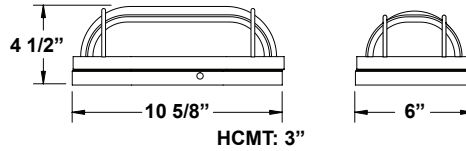

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
EFE112	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE,	W -White B - Black	P -POLYCARBONATE F -Frosted	P -Photocell
EFE114				

ENERGY STAR LE800 - 13W Power Input

CRI 80 (TYP) **W**-900lm 3000K
>65 Lumens Per Watt** **C**-1000lm 4000K

MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR

W-White **P**-POLYCARBONATE **P**-Photocell
B- Black **F**-Frosted (120V only)

L900 - 11.3W Power Input **C**-912lm 4000K
CRI 74 (TYP)
>80 Lumens Per Watt**

GU24 BASE, 120V
G13-1 X 13W **G213**-
2 X 13W **G18**-1 X
18W **G23**-1 X 23W
G26-1 X 26W or 27W

W-White **P**-POLYCARBONATE **L**-CFL, 2700K
B- Black **F**-Frosted