

## EB4 SERIES

### Reveal Round & Square Bollards



The LEPG EB3Q and EB4Q EasyLED Reveal Cutoff Bollards with polycarbonate lenses and sealed optical compartments are designed to replace HID lighting systems up to 70w MH or HPS. These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

#### Specifications and Features:

**Housing:** Extruded Aluminum Housing with Flush Mounting Base & Vandal-Resistant Screws, Flat Top, Sealed Driver Compartment.

Listing & Ratings:

**CSA:** Listed for Wet Locations, ANSI/UL 1598, 8750 IP66 Sealed LED Compartment.

**Finish:** Textured Architectural Bronze or Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

**Lens:** Clear Polycarbonate or SoftLED LumaLens Opal Polycarbonate Vandal-Resistant Inner Lens to Seal LED Array.

**Mounting Options:** Mounting Kit with 8" Anchor Bolts, Included.

EasyLED LED: Aluminum Boards

**Wattage:** Array: 16.6w, System: 20.2w; (70w HID Equivalent)

**Driver:** Electronic Driver, 120-277V, 50/60Hz or 347V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

**Warranty:** 5-Year Warranty for -40°C to +50°C Environment.




**EB3Q - Reveal Round Bollard**



**EB4Q - Reveal Square Bollard**

#### Dimensions

- Width (B)** 10<sup>1</sup>/<sub>4</sub>" (260mm)
- Diameter (D)** 4<sup>3</sup>/<sub>4</sub>" (120mm)
- Height (A)** 43<sup>1</sup>/<sub>8</sub>" (1,095mm)

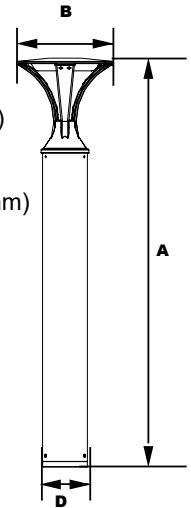

#### Order Information:

Model	Optics	Wattage	Driver	CCT	Color	Height	Options	
<b>Model</b>	<b>Optics</b>	<b>Wattage</b>	<b>Driver</b>	<b>CCT</b>	<b>Lens</b>	<b>Color</b>	<b>Options</b>	
<b>EB3Q</b> =Reveal Round Bollard	<b>F</b> =Wide Beam Spread	<b>1X16</b> =16w	<b>U</b> =120-277V <b>C</b> =347V	<b>4K</b> =4000K <b>5K</b> =5000K	<b>C</b> =Clear Polycarbonate Array Lens <b>L</b> =SoftLED LumaLens Opal Polycarbonate	<b>Z</b> =Bronze <b>B</b> =Black <b>C</b> =Custom (Consult Factory)	<b>(Leave Blank)</b> = 43 <sup>1</sup> / <sub>8</sub> " Standard Height <b>36</b> =36" Height <b>30</b> =30" Height	<b>SF</b> =Single Fuse <b>DF</b> =Double Fuse <b>SP</b> =Surge Protection <b>GF1</b> =GFCI Outlet, 15A, 120V

### Accessories & Replacement Parts:



BREBASE\*



BOADP1

\*Shown Mounted

#### Mounting Accessories (Order Separately, Field Installed)

BREBASE\* Bollard Retrofit Base Kit Adapts New Bollards to Most Existing Bolt Patterns. Fits all LEPC Bollards. Die Cast with Powdercoat Finish, Hardware Included. 1 1/2" Dia. x 1 1/2" H

\*Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)


#### Replacement Parts (Order Separately, Field Installed)

B3LL SoftLED LumaLens Opal Polycarbonate Array Lens


B4LL SoftLED LumaLens Opal Polycarbonate Array Lens

BOADP1 Adapter Plate with Gaskets for Outlet Boxes. Fits LEPC Round Bollards. Die Cast with Bronze Powdercoat Finish.

### Photometric Data

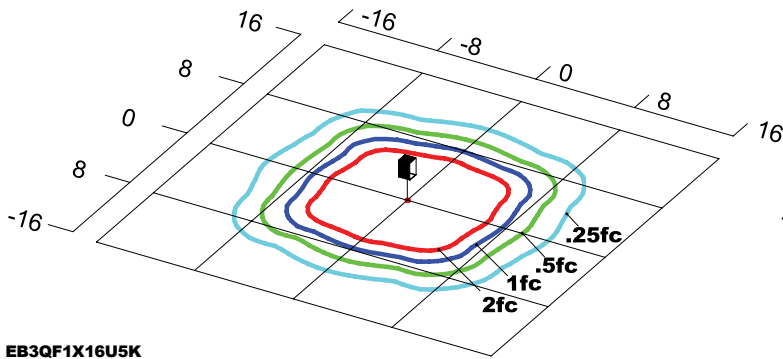

EB3QF1X16U5K  
Type V  
Grid in feet, Mounting Height = 3.5 ft.

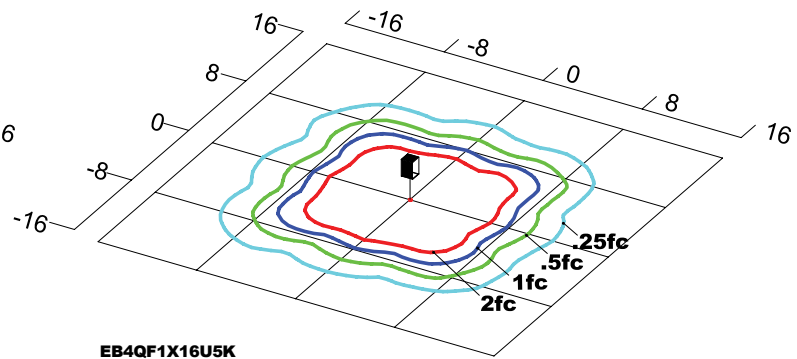

EB4QF1X16U5K  
Type V  
Grid in feet, Mounting Height = 3.5 ft.

### Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI					4000 CCT 80 CRI				
				Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
EasyLED 16w	525	20	B3 Type V	1,603	80	1	2	1	1,539	77	1	2	1
			B4 Type V	1,678	84	1	2	1	1,611	81	1	2	1

### Projected Lumen Maintenance

Data shown for 5000 CCT			Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
B3 L70 Lumen Maintenance @ 25°C / 77°F	20	1.00	0.96	0.92	0.84	187,000
B4 L70 Lumen Maintenance @ 25°C / 77°F	20	1.00	0.96	0.92	0.84	187,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C
B3 L70 Lumen Maintenance @ 50°C / 122°F	20	1.00	0.94	0.87	0.74	117,000
B4 L70 Lumen Maintenance @ 50°C / 122°F	20	1.00	0.93	0.87	0.73	113,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C
B3 L80 Lumen Maintenance @ 40°C / 104°F	20	1.00	0.97	0.93	0.87	151,000
B4 L80 Lumen Maintenance @ 40°C / 104°F	20	1.00	0.97	0.93	0.86	144,000

**NOTES:**

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.