

## EBORLQ SERIES

### EasyLED Round Dome Bollards



The LEPG EasyLED EBORLQ SERIES Bollards with choice of optics are designed to replace HID lighting systems up to 70w MH or HPS. These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

#### Specifications and Features:

**Housing:** Extruded Aluminum Housing with Flush Mounting Base & Vandal-Resistant Screws, Domed Top, Internal Ballast Tray for Easy Maintenance. Bollards Can Be Cut to Custom Lengths Upon Request.

#### Listing & Ratings:

**CSA:** Listed for Wet Locations, ANSI/UL 1598, 8750 IP65 Sealed LED Compartment.

**Finish:** Textured Architectural Bronze or Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

**Style:** Clear Prismatic Borosilicate Glass Refractor, Specially Designed Aluminum Cone Reflector or Internal Louvers

**Lens:** Clear Polycarbonate Vandal-Resistant Lens

**Mounting Options:** Mounting Kit with 8" Anchor Bolts, Included.

**EasyLED LED:** Aluminum Boards

**Wattage:** Array: 14.5w, System: 17w; (70w HID Equivalent)

**Driver:** Electronic Driver, 120-277V, 50/60Hz or 347V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

**Warranty:** 5-Year Warranty for -40°C to +40°C Environment.



Glass  
EBOGQ



Shown with "S3"  
Sensor



Shown with GFCI



LED Cone Reflector  
Shown with Glare Shield  
EBORLQ




Louvers  
EBOLQ



#### Dimensions


**Diameter (D)** 7" (178mm)  
**Height (A)** 42 1/4"  
(1,073mm)

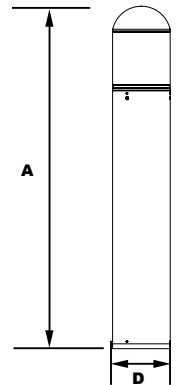

#### Order Information Example:

Model	Optics	Wattage	Driver	CCT	Color	Height	Options
<b>Model</b>	<b>Optics</b>	<b>Wattage</b>	<b>Driver</b>	<b>CCT</b>	<b>Color</b>	<b>Height</b>	<b>Options</b>
<b>EBOGQ</b> =Round Dome Bollard with Glass <b>EBORLQ</b> =Round Dome Bollard with LED Cone Reflector <b>EBOLQ</b> =Round Dome Bollard with Louvers	<b>C</b> =Type III* <b>F</b> =Wide Beam Spread  *BOGQ and BORLQ only	<b>1X15</b> =15w	<b>U</b> =120-277V <b>C</b> =347V	<b>3K</b> =3000K <b>4K</b> =4000K <b>5K</b> =5000K	<b>Z</b> =Bronze <b>B</b> =Black <b>C</b> =Custom (Consult Factory)	<b>(Leave Blank)</b> =42" Standard Height <b>36</b> =36" Height <b>30</b> =30" Height	<b>SF</b> =Single Fuse <b>DF</b> =Double Fuse <b>SP</b> =Surge Protection <b>GF1</b> =GFCI Outlet, 15A, 120V <b>GSB</b> =180° Glare Shield, Black <b>G SZ</b> =180° Glare Shield, Bronze <b>GSC</b> =180° Glare Shield, Custom Color, Consult Factory <b>BU</b> =Battery Backup, 90 Minutes

**Accessories & Replacement Parts:**

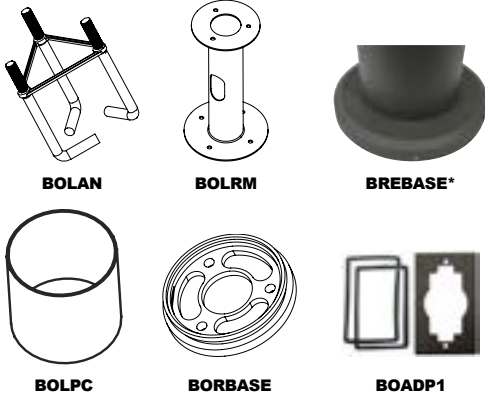

\*Shown Mounted


Mounting Accessories (Order Separately, Field Installed)	
BOLAN4	Mounting Kit, Includes Bracket & Three (3) 4" Anchor Bolts
BOLAN8	Mounting Kit, Includes Bracket & Three (3) 8" Anchor Bolts
BOLAN12	Mounting Kit, Includes Bracket & Three (3) 12" Anchor Bolts
BOLAN15	Mounting Kit, Includes Bracket & Three (3) 15" Anchor Bolts
BOLRM	Root Mount Kit
BREBASE*	Bollard Retrofit Base Kit Adapts New Bollards to Most Existing Bolt Patterns. Fits all LEPG Bollards. Die Cast with Powdercoat Finish, Hardware Included. 11 1/2" Dia. x 1 1/2" H

\*Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)


Replacement Parts (Order Separately, Field Installed)	
BOLPC	Replacement Round Polycarbonate Vandal-Resistant Lens
BORBASE*	Die Cast Base Plate with Powdercoat Finish Over a Chromate Conversion Coating.
BOADP1	Adapter Plate with Gaskets for Outlet Boxes. Fits LEPG Round Bollards. Die Cast with Bronze Powdercoat Finish.

\*Specify Color: Z=Bronze, B=Black  
For Replacement Battery Backup, see the LEPG LED Battery Backup Specification Sheet.

**Photometric Data**

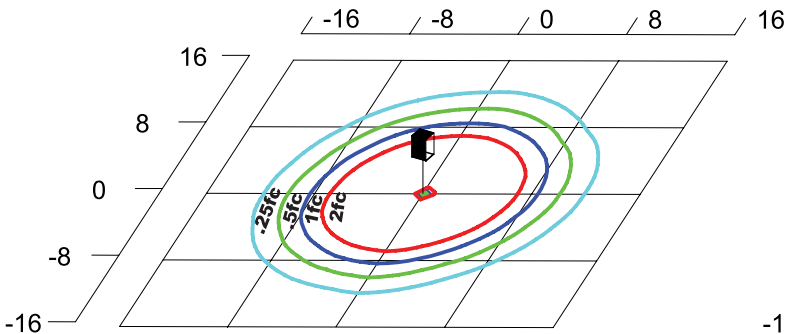

**EBOGQF1X15U5K**  
Type V  
Grid in feet, Mounting Height = 3.5 ft.

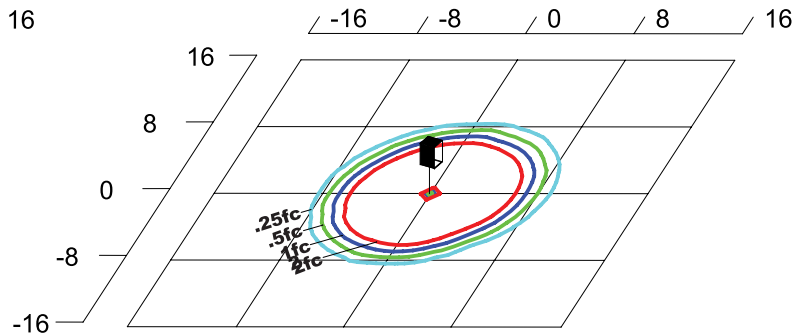

**EBOGRLQF1X15U5K**  
Type V  
Grid in feet, Mounting Height = 3.5 ft.

**Photometric Performance**

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI					4000 CCT 80 CRI					3000 CCT 80 CRI				
				Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
EasyLED 15w	116	17	BOG Glass	1,132	67	1	3	1	1,086	64	1	3	1	905	53	1	3	1
			BOL Louvers	763	45	1	2	1	733	43	1	2	1	675	40	1	2	1
			BORL Cone Reflector	1,510	89	1	3	1	1,450	85	1	3	1	1,225	72	1	3	1
			BORL Type III Optic	1,081	64	0	3	1	989	58	0	2	1	918	54	0	2	1

**Projected Lumen Maintenance**

Data shown for 5000 CCT		Compare to MH				
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
L70 Lumen Maintenance @ 25°C / 77°F	17	1.00	0.95	0.90	0.80	147,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C
L70 Lumen Maintenance @ 50°C / 122°F	17	1.00	0.89	0.78	0.55	67,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C
L80 Lumen Maintenance @ 40°C / 104°F	17	1.00	0.92	0.85	0.70	66,000

**NOTES:**  
1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 116mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.  
Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.