

## EBOWFLQ

### AmberLED Round Flat Bollards



The LEPG AmberLED Round Flat Top Bollards are available with cone reflector or louvers with 270° glare shield, and are certified by the Florida Fish & Wildlife Conservation Commission (FWC) for wildlife applications that are directly visible from the shore requiring monochromatic AMBER light. LEDs operate between 585 and 595 nm, greater than 560nm required by FWC. Typical applications include retail centers, hotels, residential, parks, schools and universities, office buildings and medical facilities.

#### Specifications and Features:

**Housing:**  
 Extruded Aluminum Housing with Flush Mounting Base & Vandal-Resistant Screws, Flat Top, Internal Ballast Tray for Easy Maintenance. Includes 270° Shield Required to Maintain FWC Certification. Bollards Can Be Cut to Custom Lengths Upon Request.

**Listing & Ratings:**  
 CSA: Listed for Wet Locations, ANSI/UL 1598, 8750  
 IP65 Sealed LED Compartment.

**Finish:**  
 Textured Architectural Bronze or Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

**Style:**  
 Specially Designed Aluminum Cone Reflector or Internal Louvers

**Lens:**  
 Clear Polycarbonate Vandal-Resistant Lens

**Mounting Options:**  
 Mounting Kit with 8" Anchor Bolts, Included.

**AmberLED:**  
 Aluminum Boards

**Wattage:**  
 Array: 14.5w, System: 17w; (70w HID Equivalent)

**Driver:**  
 Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

**Warranty:**  
 5-Year Warranty for -40°C to +40°C Environment.

#### Ordering Information:




Louvers  
EBOWFLQ



#### Dimensions

Diameter (D)	7" (178mm)
Height (A)	41 5/8" (1,057mm)

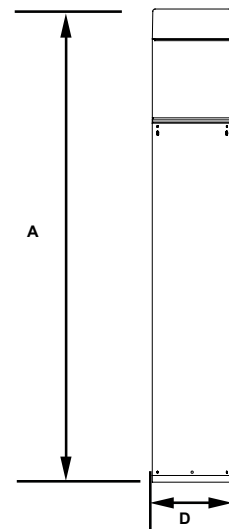

Model	Optics	Wattage	Driver	CCT	Color	Height	Options
<b>EBOWFRLQ</b> =Round Flat Top Bollard with LED Cone Reflector and 270° Shield	<b>F</b> =Wide Beam Spread	<b>1X15</b> =15w	<b>U</b> =120-277V	<b>AM</b> =Amber	<b>Z</b> =Bronze <b>B</b> =Black <b>C</b> =Custom (Consult Factory)	<b>(Leave Blank)</b> =42" Standard Height <b>36</b> =36" Height <b>30</b> =30" Height	<b>SF</b> =Single Fuse <b>DF</b> =Double Fuse <b>SP</b> =Surge Protection <b>GF1</b> =GFCI Outlet, 15A, 120V <b>BU</b> =Battery Backup, 90 Minutes
<b>EBOWFLQ</b> =Round Flat Top Bollard with Louvers and 270° Shield							


Job Name: \_\_\_\_\_

Type: \_\_\_\_\_


Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

### Accessories & Replacement Parts:




BOLAN



BOLRM



BREBASE\*



BORBASE



BOADP1

\*Shown Mounted

Mounting Accessories (Order Separately, Field Installed)	
BOLAN4	Mounting Kit, Includes Bracket & Three (3) 4" Anchor Bolts
BOLAN8	Mounting Kit, Includes Bracket & Three (3) 8" Anchor Bolts
BOLAN12	Mounting Kit, Includes Bracket & Three (3) 12" Anchor Bolts
BOLAN15	Mounting Kit, Includes Bracket & Three (3) 15" Anchor Bolts
BOLRM	Root Mount Kit
BREBASE*	Bollard Retrofit Base Kit Adapts New Bollards to Most Existing Bolt Patterns. Fits all LEPC Bollards. Die Cast with Powdercoat Finish, Hardware Included. 1 1/2" Dia. x 1 1/2" H


\*Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)

Replacement Parts (Order Separately, Field Installed)	
BORBASE*	Die Cast Base Plate with Powdercoat Finish Over a Chromate Conversion Coating.
BOADP1	Adapter Plate with Gaskets for Outlet Boxes. Fits LEPC Round Bollards. Die Cast with Bronze Powdercoat Finish.

\*Specify Color: Z=Bronze, B=Black

For Replacement Battery Backup, see the LEPC LED Battery Backup Specification Sheet.

### Photometric Data

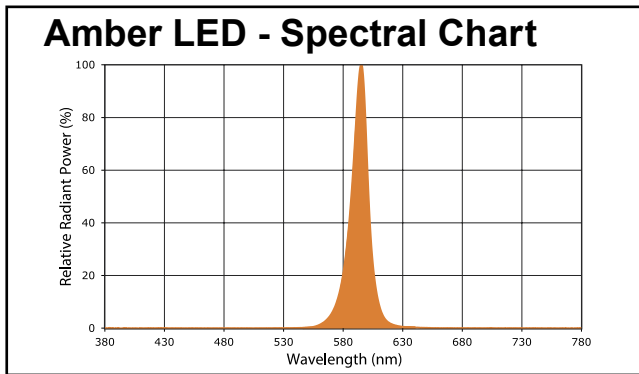

### Projected Lumen Maintenance

Data shown for Amber LEDs			Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
L70 Lumen Maintenance @ 25°C / 77°F	17	1.00	0.95	0.90	0.80	147,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C
L70 Lumen Maintenance @ 50°C / 122°F	17	1.00	0.89	0.78	0.55	67,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C
L80 Lumen Maintenance @ 40°C / 104°F	17	1.00	0.92	0.85	0.70	66,000

**NOTES:**

- Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 116mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
- Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.