

ELEDOSEC

LED Outdoor Security Luminaires



The ELEDOSEC series is an economical group of outdoor security luminaires. Models are available with either one, two or three heads, and with either built-in photocells or combination motion sensors and photocells. With a high-strength, cast aluminum housing and a high-quality, UV-resistant glass diffuser, the ELEDOSEC is a versatile and durable outdoor luminaire. High-efficacy, long-life LEDs provide both energy and maintenance cost savings compared to traditional outdoor security luminaires.

FEATURES

- Available in 4000k (neutral white) and 5000k (cool white) color temperatures.*
- Long-life LEDs provide 53,000 hours of operation with at least 70% of initial lumen output (L70).**
- Models with one head provide 1,064 to 1,069 lumens and 89 lumens per watt (LPW).*
- Models with two heads provide 2,041 to 2,089 lumens and 82 to 84 LPW.*
- Models with three heads provide 3,105 to 3,135 lumens and 86 to 87 LPW.*
- Operates on 120 AC voltage (60Hz).
- Power factor > 0.90.
- Color rendering index > 80.
- Die cast aluminum housing with durable, powder coat paint.
- Glass lens is sealed and gasketed to prevent leaks.
- Easy installation in new construction or retrofit.

* Contact factory for other color temperatures and lumen packages.
 ** L₇₀ hours are IES TM-21-11 calculated hours.
 *** Excludes ELEDOSEC-3 models.




Model
 ELEDOSEC-3-PCMS-BRZ
 (3 heads, motion sensor & photocell, bronze finish)

WARRANTY & LISTINGS

- cETLus listed for wet locations in ambient temperatures from 10°C to 40°C (14°F to 104°F).
- Energy Star approved.***
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- Complies with FCC Part 15, class B.
- Protected against input line transients (2.5kV).
- 5-year warranty on all electronics and housing.

DIMENSIONS

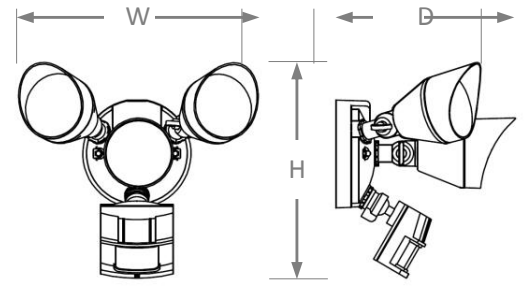

Photocell Only			Photocell & Motion Sensor		
1-Head	2-Heads	3-Heads	1-Head	2-Heads	3-Heads
5"W	11"W	11"W	5"W	11"W	11"W
5½"H	6¾"H	6¾"H	10"H	10"H	10"H
8¼"D	6¾"D	8¼"D	8¼"D	6¾"D	8¼"D

Model	# Heads	Sensor	Housing Color	Color Temperature
Model	# Heads	Sensor	Housing Color	Color Temperature
ELEDOSEC	1 = 1 head 2 = 2 heads 3 = 3 heads	PC = Photocell only PCMS = Photocell & motion sensor	BRZ = Dark bronze WHT = White	4K = 4000k 5K = 5000k

ELECTRICAL

Model	Color Temperature	CRI ¹	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage ²	Input Current (A)	Power Factor	L ₇₀ Hours ³
ELEDOSEC-1-PC	4000k / 5000k	> 80	1,069	12	89	120	0.10	> 90%	53,000
ELEDOSEC-1-PCMS	4000k / 5000k	> 80	1,064	12	89	120	0.10	> 90%	53,000
ELEDOSEC-2-PC	4000k / 5000k	> 80	2,089	25	84	120	0.21	> 90%	53,000
ELEDOSEC-2-PCMS	4000k / 5000k	> 80	2,041	25	82	120	0.21	> 90%	53,000
ELEDOSEC-3-PC	4000k / 5000k	> 80	3,105	36	86	120	0.30	> 90%	53,000
ELEDOSEC-3-PCMS	4000k / 5000k	> 80	3,135	36	87	120	0.30	> 90%	53,000


¹ Color rendering index.

² 60Hz.

³ L₇₀ refers to the number of hours at which lumen output declines to 70% of the initial level. L₇₀ hours are IES TM-21-11 calculated hours.

PHOTOMETRIC DATA

ELEDOSEC-3-PCMS (3,135 Lumens)

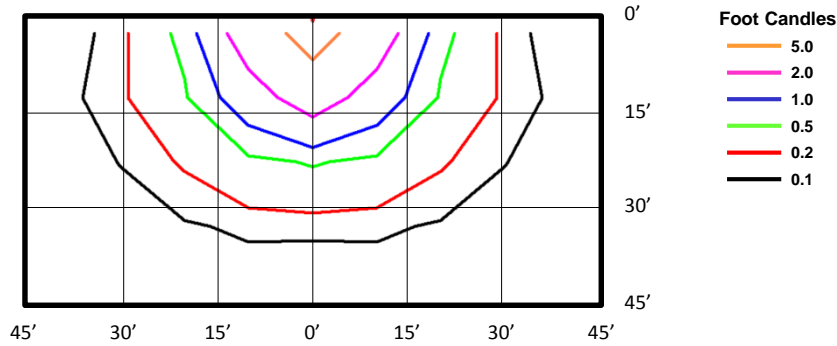

Notes:

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 15 feet.