

## AADC150

LED WALLPACK LUMINAIRE



### HEAVY-DUTY HOUSING

The DC150 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

### WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

### EASY TO INSTALL MOUNTING

The DC150 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD TYPE IV DISTRIBUTION

OPERATING TEMPERATURE -20C TO 40C


0C - 40C with EM Pack Option

### PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.72	3000K	1457.50	114.58	STANDARD
12W	12.72	4000K	1530.38	120.31	STANDARD
12W	12.72	5000K	1606.89	126.33	STANDARD
24W	23.02	3000K	2915.00	126.63	STANDARD
24W	23.02	4000K	3060.75	132.96	STANDARD
24W	23.02	5000K	3213.79	139.61	STANDARD
36W	34.27	3000K	4372.50	127.59	STANDARD
36W	34.27	4000K	4591.12	133.97	STANDARD
36W	34.27	5000K	4820.68	140.67	STANDARD
48W	46.60	3000K	5588.65	119.93	STANDARD
48W	46.60	4000K	5756.31	123.53	STANDARD
48W	46.60	5000K	5929.00	127.23	STANDARD
60W	56.83	3000K	6719.78	118.24	STANDARD
60W	56.83	4000K	7055.77	124.16	STANDARD
60W	56.83	5000K	7408.56	130.36	STANDARD
72W	67.65	3000K	8252.43	121.99	STANDARD
72W	67.65	4000K	8665.05	128.09	STANDARD



### PRODUCT DIMENSIONS

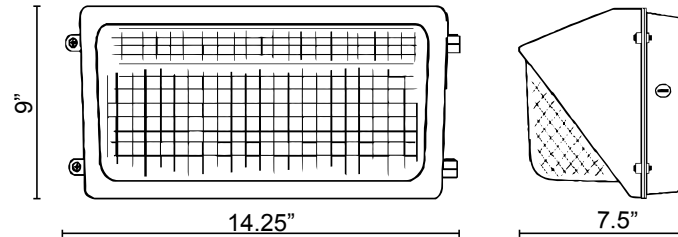

POWER  
 POWER FACTOR >0.90 - THD <20

### PRODUCT APPLICATIONS

- Building Entrances Walkways
- Tunnels
- Loading Docks
- Bridges
- Stairwells
- Catwalks

### ORDERING GUIDE

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
<b>DC150</b>				
DC150	12W 12 WATTS 24W 24 WATTS 36W 36 WATTS 48W 48 WATTS 60W 60 WATTS 72W 72 WATTS	27K 2700K - WARM WHITE 30K 3000K - WARM WHITE 35K 3500K - NEUTRAL WHITE 40K 4000K - NEUTRAL WHITE 50K 5000K - COOL WHITE 55K 5500K - DAYLIGHT	BZ BRONZE (STANDARD) WH WHITE BL BLACK SL SILVER CC CUSTOM COLOR	PC1 120V PHOTOCELL PC2 208/277V PHOTOCELL MS MOTION SENSOR MS-DS2 MOTION SENSOR WITH BILEVEL DIMMING D1 0-10V DIMMING D2 STEP DIMMING (120V ONLY) EM EMERGENCY BATTERY PACK V1* 480/347V INPUT (120-277V STANDARD) <i>*NOT AVAILABLE WITH EM, PHOTOCELL OR MOTION SENSOR</i>