

ACV304

LED CANOPY LUMINAIRE



COMPACT, HEAVY-DUTY HOUSING

The CV304 is a 12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

The CV304 can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry

120-277V STANDARD

PRODUCT APPLICATIONS



- Building Canopy Parking Garages
- Tunnels
- Storage Facilities
- Gas Stations

PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | TESTED WATTAGE | CCT | LUMENS | EFFICACY |
|-----------------|----------------|-------|--------|----------|
| 12W | 12.00 | 3000K | 1,370 | 114.17 |
| 12W | 12.00 | 4000K | 1,439 | 119.92 |
| 12W | 12.00 | 5000K | 1,510 | 125.83 |
| 24W | 23.68 | 3000K | 2,740 | 115.71 |
| 24W | 23.68 | 4000K | 2,877 | 121.49 |
| 24W | 23.68 | 5000K | 3,021 | 127.58 |
| 36W | 34.27 | 3000K | 4,110 | 119.93 |
| 36W | 34.27 | 4000K | 4,315 | 125.91 |
| 36W | 34.27 | 5000K | 4,531 | 132.21 |
| 48W | 46.70 | 3000K | 5,480 | 117.34 |
| 48W | 46.70 | 4000K | 5,754 | 123.21 |
| 48W | 46.70 | 5000K | 6,042 | 129.38 |
| 60W | 58.59 | 3000K | 6,850 | 116.91 |
| 60W | 58.59 | 4000K | 7,193 | 122.77 |
| 60W | 58.59 | 5000K | 7,552 | 128.90 |
| 72W | 67.11 | 3000K | 8,220 | 122.49 |
| 72W | 67.11 | 4000K | 8,631 | 128.61 |
| 72W | 67.11 | 5000K | 9,063 | 135.05 |



PRODUCT DIMENSIONS

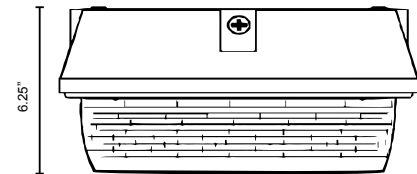

POWER
POWER FACTOR >90 - THD <20

ORDERING GUIDE

| MODEL | WATTAGE | COLOR TEMPERATURE (CCT) | HOUSING COLOR | OPTIONS & ACCESSORIES |
|--------|---------|---------------------------|----------------------|--|
| ACV304 | | | | |
| ACV304 | 12W | 27K 2700K - WARM WHITE | BZ BRONZE (STANDARD) | PC1 120V PHOTOCELL |
| | 24W | 30K 3000K - WARM WHITE | WH WHITE | PC2 208/277V PHOTOCELL |
| | 36W | 35K 3500K - NEUTRAL WHITE | BL BLACK | MS MOTION SENSOR |
| | 48W | 40K 4000K - NEUTRAL WHITE | SL SILVER | D1 0-10V DIMMING |
| | 60W | 50K 5000K - COOL WHITE | CC CUSTOM COLOR | D2 STEP DIMMING |
| | 72W | 55K 5500K - DAYLIGHT | | EM EMERGENCY BATTERY PACK |
| | | | | V1 * 480/347V INPUT (120-277V STANDARD) |
| | | | | *NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR |