

ADCSHM

ROUND LED WALLPACK LUMINAIRE



FULL CUTOFF, HEAVY-DUTY HOUSING

The DCSHM is an 18" Half-Moon Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

4" x 4" Gasketed Wall Plate allows the Installer to Quickly Mount and Wire the Fixture without Opening the Housing

120-277V STANDARD


OPERATING TEMPERATURE -20C TO 40C
 0C - 40C with EM Pack Option



PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.65	3000K	1,530.00	120.95	PREMIUM
12W	12.65	4000K	1,606.50	127.00	PREMIUM
12W	12.65	5000K	1,686.83	133.35	PREMIUM
24W	23.68	3000K	2,802.00	118.33	PREMIUM
24W	23.68	4000K	2,942.10	124.24	PREMIUM
24W	23.68	5000K	3,089.21	130.46	PREMIUM
36W	34.27	3000K	4,203.00	122.64	PREMIUM
36W	34.27	4000K	4,413.15	128.78	PREMIUM
36W	34.27	5000K	4,633.81	135.21	PREMIUM
48W	46.60	3000K	5,604.00	120.26	PREMIUM
48W	46.60	4000K	5,884.20	126.27	PREMIUM
48W	46.60	5000K	6,178.41	132.58	PREMIUM
60W	56.83	3000K	7,005.00	123.26	PREMIUM
60W	56.83	4000K	7,355.25	129.43	PREMIUM
60W	56.83	5000K	7,723.01	135.90	PREMIUM

PRODUCT DIMENSIONS

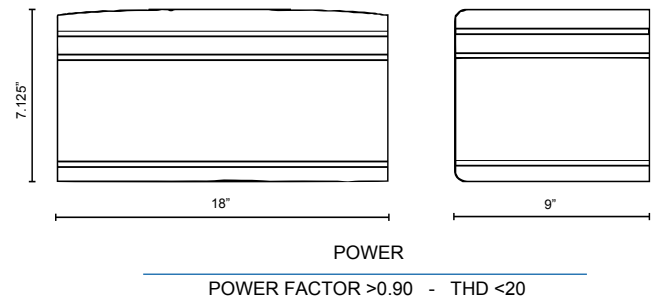

PRODUCT APPLICATIONS

- Building Entrances Walkways
- Tunnels
- Loading Docks
- Stairwells
- Bridges
- Catwalks

ORDERING GUIDE

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
DCSHM				
DCSHM	12W 12 WATTS 24W 24 WATTS 36W 36 WATTS 48W 48 WATTS 60W 60 WATTS	27K 2700K - WARM WHITE 30K 3000K - WARM WHITE 35K 3500K - NEUTRAL WHITE 40K 4000K - NEUTRAL WHITE 50K 5000K - COOL WHITE 55K 5500K - DAYLIGHT	BZ BRONZE (STANDARD) WH WHITE BL BLACK SL SILVER CC CUSTOM COLOR	MS MOTION SENSOR MS-DS2 MOTION SENSOR WITH BILEVEL DIMMING D1 0-10V DIMMING D2 STEP DIMMING EM EMERGENCY BATTERY PACK V1* 480/347V INPUT (120-277V STANDARD) <small>*NOT AVAILABLE WITH EM, PHOTOCELL OR MOTION SENSOR</small>