

AWCTRS

AmberLED Down Light Turbine LED Wall Cylinder



The LEPG AmberLED AWCTRS C3 Turbine Full Cut-off wall mount cylinder is available with a shielded IES Type V distribution, and is certified by the Florida Fish & Wildlife Conservation Commission (FWC) for wildlife applications that are directly visible from the shore requiring monochromatic AMBER light. LEDs operate between 585 and 595 nm, greater than 560nm required by FWC. Typical applications include retail centers, hotels, residential, parks, schools and universities, office buildings and medical facilities. Mounting heights of up to 12 feet can be used based on light level and uniformity requirements.

Specifications and Features:

Housing: Extruded Round Aluminum Housing with Built-in Heat Sinks. Includes Visor Required to Maintain FWC Certification.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP66 Sealed LED Compartment.

Finish: Textured Architectural Bronze or Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens: Tempered Clear Flat Glass Lens

Reflector: Wide, Medium and Narrow Distributions

Mounting Options: Mount Over a 4" Recessed Outlet Box.

COB LED: Amber COB

Wattage: COB 20w, System Input 21w; (100w HID Equivalent)

Driver: Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Controls: Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPG Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty: 5-Year Warranty for -40°C to +50°C Environment.




Shown with "VS" Visor



Shown with "A" Medium Optic



Shown with "D" Narrow Optic

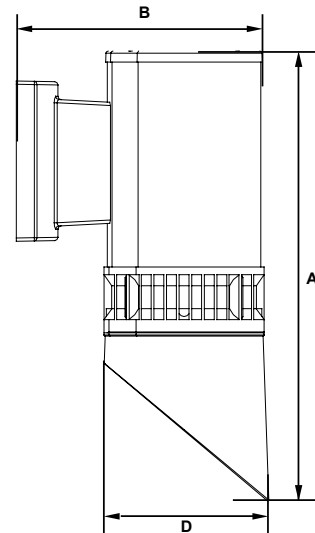

Dimensions

Diameter (D)	5 3/4" (146mm)
Length (B)	8 7/8" (226mm)
Height (A)	16 1/4" (410mm)

Order Information:

Model	Optics	LED	Wattage	Driver	CCT	Color	Options	Shield
AWCTRS		C3=Amber COB	1X20=20w	U=120-277V	AM=Amber			VS=Visor
AWCTRS= AmberLED Down Light Wall Cylinder	A=70° Reflector B=100° Reflector D=30° Reflector	C3=Amber COB	1X20=20w	U=120-277V	AM=Amber	Z=Bronze B=Black C=Custom (Consult Factory)	SF=Single Fuse DF=Double Fuse SP=Surge Protection PC1=Photocell, 120VAC PC3=Photocell, 120-277VAC BU=Battery Backup, 90 Minutes	VS=Visor

Accessories & Replacement Parts:




P18100 & P18103

**Replacement Parts
(Order Separately, Field Installed)**

P18100	120VAC Photocell
P18103	120-277VAC Photocell

For Replacement Battery Backup, see the LEPG LED Battery Backup Specification Sheet.

Photometric Data

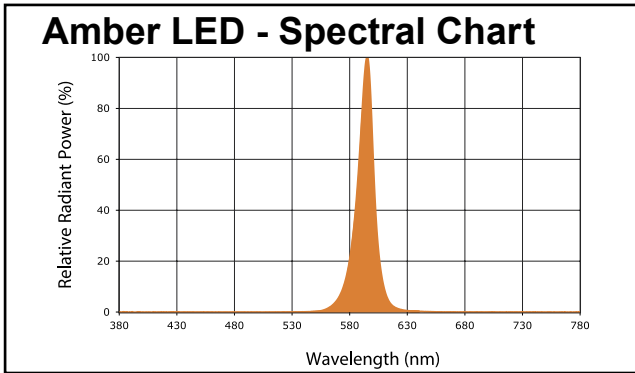

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Beam	
			Beam Type	Beam Angle
LED COB 20w	525	21	A	Medium
			B	Wide
			D	Narrow

Projected Lumen Maintenance

Data shown for 4100 CCT			Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
L70 Lumen Maintenance @ 25°C / 77°F	21	1.00	0.92	0.83	0.66	89,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C
L70 Lumen Maintenance @ 50°C / 122°F	21	1.00	0.90	0.81	0.62	78,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C
L80 Lumen Maintenance @ 40°C / 104°F	21	1.00	0.93	0.86	0.72	72,000

NOTES:

- Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
- Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.