Job Name:

Type:

Part #:

Notes:

EEXWL4X

Nema 4X Rated Exit Sign

FEATURES

Grey fiberglass housing.
Fully gasketed with a hot-bonded silicone. Wall, ceiling or end mounting.
Corrosion resistant.
NEMA 4X construction with removable chevrons.

ELECTRICAL

120/277 volt input.
Solid state transfer.

LAMPS

High intensity LED panel.
9 watt PAR36 sealed beam standard (EX4XC).
Heads constructed of high impact thermoplastic in black finish.

BATTERY

Maintenance free sealed lead acid battery.

CODE COMPLIANCE

UL/ETL listed.
NFPA 101 Life Safety Code compliant, NEC and OSHA compliant.

WARRANTY

5 year warranty.

DIMENSIONS

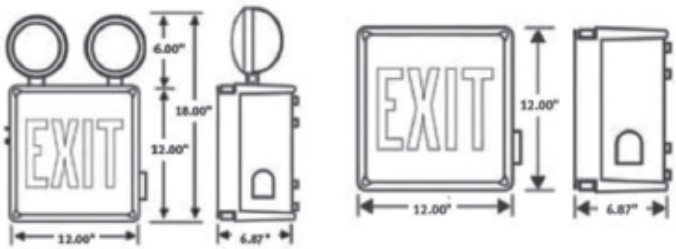

ORDERING INFORMATION

SERIES	FACE #	LETTER COLOR	HOUSING COLOR	MOUNTING OPTIONS	OPTIONS
EEXWL4X			W - White (standard)		
EEXWL4X	1 - Single Face 2 - Double Face	R - Red G -Green	W - White (standard)	W - Wall Mount (Standard) E - End Mount C - Ceiling Mount	SDT - Self Diagnostics TD - Time Delay (specify voltage) HTR - Internal Heater (specify voltage) NI - NiCad Battery H - Halogen Lamps

05.2020

Office: 215-512-7000 • Fax: 267-288-5604
www.EnvoyLighting.com

Specifi cations subject to change without prior notice.

© 2020, Envoy Lighting, Inc. ALL RIGHTS RESERVED