

Job Name: _____

Type: _____

Part #: _____

Notes: _____

EXCWL4X

Nema 4X Rated Exit Sign & Combo Units



FEATURES

Grey fiberglass housing.
Fully gasketed with a hot-bonded silicone. Wall, ceiling or end mounting.
Corrosion resistant.
NEMA 4X construction with removable chevrons.

ELECTRICAL

120/277 volt input.
Solid state transfer.

LAMPS

High intensity LED panel.
9 watt PAR36 sealed beam standard (EX4XC).
Heads constructed of high impact thermoplastic in black finish.

BATTERY

Maintenance free sealed lead acid battery.

CODE COMPLIANCE


UL/ETL listed.
NFPA 101 Life Safety Code compliant, NEC and OSHA compliant.

WARRANTY

5 year warranty.



DIMENSIONS

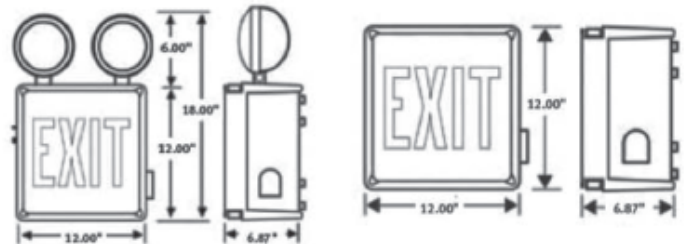

ORDERING INFORMATION

SERIES	FACE #	LETTER COLOR	HOUSING COLOR	MOUNTING OPTIONS	OPTIONS
			W - White (standard)		
EXCWL4X	1 - Single Face 2 - Double Face	R - Red G -Green	W - White (standard)	W - Wall Mount (Standard) E - End Mount C - Ceiling Mount	SDT - Self Diagnostics TD - Time Delay (specify voltage) HTR - Internal Heater (specify voltage) NI - NiCad Battery H - Halogen Lamps

05.2020