

EasyLED Stainless Steel Bollards



The LEPG EasyLED Bollards with choice of optics are designed to replace HID lighting systems up to 70w MH or HPS. These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

Specifications and Features:

Housing: Formed 316L Stainless Steel Housing with Flush Mounting Base & Vandal-Resistant Screws, Domed Top, Internal Ballast Tray for Easy Maintenance

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750 IP65 Sealed LED Compartment.

Style: Specially Designed Cone Reflector or Internal Louvers

Lens: Clear UV-Stabilized Polycarbonate Vandal-Resistant Lens

Mounting Options: Mounting Kit with 8" Anchor Bolts, Included.

EasyLED LED: Aluminum Boards

Wattage: Array: 14.5w, System: 17w; (70w HID Equivalent)

Driver: Electronic Driver, 120-277V, 50/60Hz or 347V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Controls: Fixtures Ordered with Factory-Installed Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPG Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.


Warranty: 5-Year Warranty for -40°C to +40°C Environment.

Order Information:








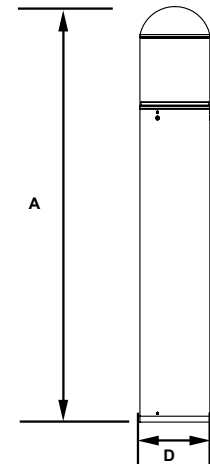















Dimensions

Diameter (D)	7" (178mm)
Height (A)	41 1/4" (1,060mm)




Model	Optics	Wattage	Driver	CCT	Color	Height	Options
		1X15=15w			SS=Stainless Steel		
ABORLQ=Round Dome Bollard with LED Cone Reflector ABORWQ=Round Dome Bollard with White LED Cone Reflector ABOLQ=Round Dome Bollard with Louvers	C=Type III* F=Wide Beam Spread *ABORLQ & ABORWQ Only	1X15=15w	U=120-277V C=347V	3K=3000K 4K=4000K 5K=5000K	SS=Stainless Steel	(Leave Blank)= 42" Standard Height 36=36" Height 30=30" Height	SF=Single Fuse (120-277V Only) DF=Double Fuse (120-277V Only) SP=Surge Protection GF1=GFCI Outlet, 15A, 120V GSB=180° Glare Shield, Black GSZ=180° Glare Shield, Bronze GSC=180° Glare Shield, Custom Color (Consult Factory) S3=Internal Microwave Sensor (120-277V Only) BU=Battery Backup, 90 Minutes

Accessories & Replacement Parts:

Mounting Accessories (Order Separately, Field Installed)			Accessories (Order Separately, Field Installed)			Replacement Parts (Order Separately, Field Installed)			
			BOLAN4	Mounting Kit, Includes Bracket & Three (3) 4" Anchor Bolts	P17122	Remote Programming Tool for P17121	P17121	Internal Microwave Sensor (120-277V Only)	
			BOLAN8	Mounting Kit, Includes Bracket & Three (3) 8" Anchor Bolts			BOLPC	Replacement Round UV-Stabilized Polycarbonate Vandal-Resistant Lens	
			BOLAN12	Mounting Kit, Includes Bracket & Three (3) 12" Anchor Bolts			BORBASE	Die Cast Base Plate with Black Powdercoat Finish Over a Chromate Conversion Coating.	
			BOLAN15	Mounting Kit, Includes Bracket & Three (3) 15" Anchor Bolts			BOADP1	Adapter Plate with Gaskets for Outlet Boxes. Fits LEPC Round Bollards. Die Cast with Bronze Powdercoat Finish.	
			BREBASE*	Bollard Retrofit Base Kit Adapts New Bollards to Most Existing Bolt Patterns. Fits all LEPC Bollards. Die Cast with Powdercoat Finish, Hardware Included. 1 1/2" Dia. x 1 1/2" H					
			*Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)						
									For Replacement Battery Backup, see the LEPC LED Battery Backup Specification Sheet.

*Shown Mounted

Photometric Data

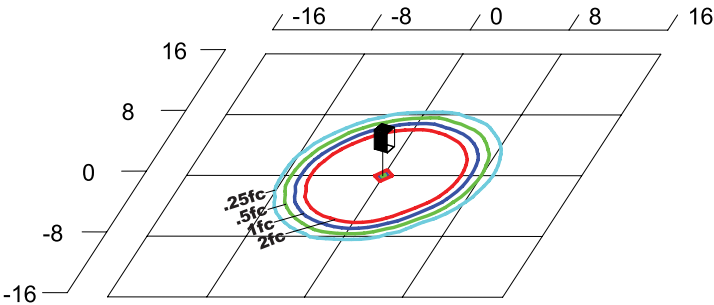

ABORLQF1X15U5K
Type V
Grid in feet, Mounting Height = 3.5 ft.

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI					4000 CCT 80 CRI					3000 CCT 80 CRI				
				Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
EasyLED 15w	116	17	BOL Round Louvers	763	45	1	2	1	733	43	1	2	1	675	40	1	2	1
			Cone Reflectors	1,510	89	1	3	1	1,450	85	1	3	1	1,223	72	1	3	1
			Reflectors/Type III Optic	1,081	64	0	3	1	989	58	0	2	1	918	54	0	2	1

Projected Lumen Maintenance

Data shown for 5000 CCT			Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
L70 Lumen Maintenance @ 25°C / 77°F	17	1.00	0.95	0.90	0.80	147,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C
L70 Lumen Maintenance @ 50°C / 122°F	17	1.00	0.89	0.78	0.55	67,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C
L80 Lumen Maintenance @ 40°C / 104°F	17	1.00	0.92	0.85	0.70	66,000

NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 116mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.