

## 9 @ 8 < ! G % %

89G7 F-DH-CB

%&\$!&+ + J 5 7 Z %& Gei UfY @ 8 F Y W g g Y X ' 8 c k b ` ] [ \ hg

89G B: 95HI F9G

**Housing:**

- Galvanized steel housing, white painted.
- 5-15/16" height allows to use in 2" x 6" joist construction.
- Housing adjusts for ceilings up to 1-1/4" thick.

**Mounting Frame:**

- Galvanized steel construction.

**Junction Box:**

- Listed for through branch circuit wiring. (Max. 8 No 12 AWG 90°C branch circuit conductors. (4 in, 4 out)
- (5) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- Ground wire provided on J-box.

**Bar Hangers:**

- Maximum extension by 24" allows excess distance between joists.
- Housing can be positioned at any point within 24" joist span.
- Score lines allow "toolless" shortening for 12" joists. Bar hangers may be repositioned 90 degrees.
- Integral T-bar clips snaps onto T-bars and no additional clips are required.

**LED Power Supply:**

- Universal, 120~277 VAC input, high efficiency dimming drivers with ① Triac/ELV dimmer switches or ② Triac/ELV/0-10V dimmer switches.
- Drivers feature power factor > .90, THD < 20% with integral thermal protection to sense over temperature or electrical issues.
- Driver mounts externally to the module to allow future replacement or upgrading if desired. Optional Lutron Hi-lume A-Series, LED drivers and EcoSystem 5-Series LED drivers are available. Lutron drivers provide flicker-free, smooth, continuous dimming down to 1% for Hi-lume and 5% for EcoSystem. (Contact factory for dimming system requirements)

**Trim:**

- Steel white painted square trim with acrylic or glass lens.


**Listing:**

- ETL listed for wet location.

SPECIFICATION				
Input Voltage	120-277VAC			
Wattage (+/-5%)	14 W	23W	30W	45W
Lumen (+/-5%)	785 lm	1,290lm	1,682lm	2,523lm
CCT (Color +/-5%)	2700K, 3000K, 3500K, 4000K			
Dimming	Triac/ELV, Triac/ELV/0-10V, or Lutron Dimming			
LED Module	5 yr/50K hr			
Environment	Wet Location			




**DIMENSIONS:**

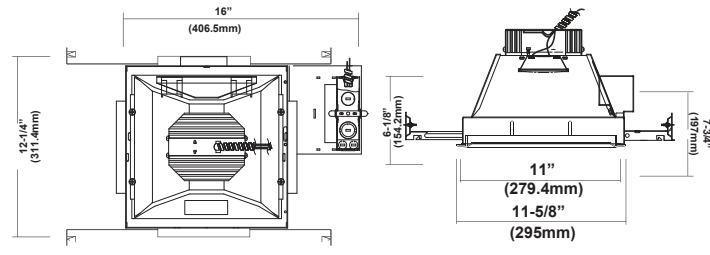

Ceiling Cut-out : 11-1/4" x 11-1/4"

**Just-A-Nail**


Adjustable nail hanger bar for easy alignment.

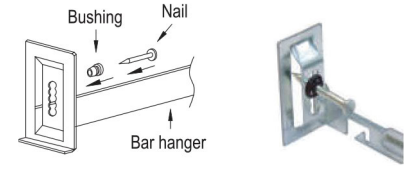

**JUST-A-NAIL:**

- Pre-installed nail bars with vertical slots are used to evenly align the bars horizontally after nailing halfway into wood joists.
- Optional "Quick Connect" Push-in wire connectors.**
  - Three "Quick Connectors"
  - Pre-installed push-in wire connectors for fast and easy wiring.

**TRIMS:**

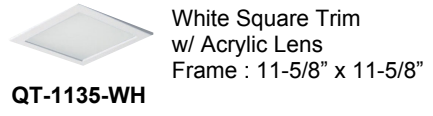

CfXYf]b[ `bZfa Ujcb

AC89@	7 c`cf`HYa d`†	8fjj Yf
ELEDH-S1114QT-1135-WH = 14W	27 = 2700K	UTD = 120~277VAC, Triac/ELV Dimming (14,23,30W only)
ELEDH-S1123QT-1135-WH = 23W	30 = 3000K	UZTD=120~277V, Triac/ELV/0-10V Dimming
ELEDH-S1130QT-1135-WH = 30W	35 = 3500K	L1D= Lutron Hi-lume 1% Dimming
ELEDH-S1145QT-1135-WH = 45W	40 = 4000K	L5D= Lutron EcoSystem 5% Dimming
		LTE= Lutron Hi-lume 1% 2-Wire Dimming