

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## EINDWLEZU

### NEMA4X/NSF EXIT SIGN

#### STANDARD



#### OPTIONAL



#### ILLUMINATION

Ultra bright, energy efficient, long life Red or Green LEDs.

#### ELECTRICAL

Dual 120/277 voltage.

Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).

Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.

4.8V long-life, maintenance-free, rechargeable NiCd battery (EM models only). Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

#### MOUNTING

Universal knockout pattern on back provided with gasket for watertight seal for back mount.

Polycarbonate mounting canopy included for top or end mount.

#### HOUSING

Housing is reinforced polycarbonate construction in white, gray or black finish. Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.

Knockout's provided for conduit feed applications.

EZ snap-out Chevron directional indicators.

#### OPTIONS

SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

2C-120V/2C-277V: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different.

TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

#### WARRANTY / LISTING

Five year warranty on all electronics and housing. Batteries pro-rated for five years.

Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.

IP66 rated for Ingress protection.


NEMA4X and NSF rated.

Certified to CEC under Title 20 Regulations.

UL certified for use in food service operations.

UL listed for wet locations (-20°C – 50°C).

#### DIMENSIONS

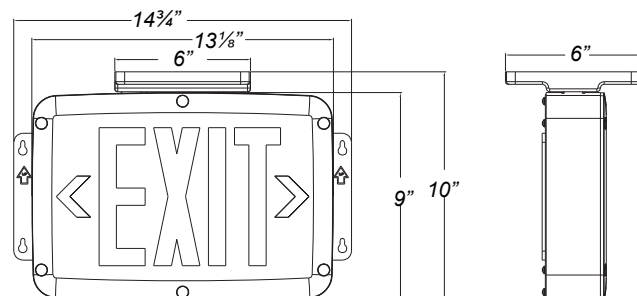

#### ORDERING INFORMATION:

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
EINDWLEZU	1 2	R Red G Green	W White B Black G Gray	(blank) AC-Only EM NiCd Battery	SDT 2C-120 2C-277 TP Self-Diagnostics 1 Dual Circuit With 120V Input 2 Dual Circuit With 277V Input 2 Tamper-Proof