

ECARELZXTE

Chicago Approved LED Edgelit Exit Signs –

Recessed Mount



ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination
- UV stabilized, silk screened acrylic panels provide consistent, uniform illumination
- Single or double face configurations

ELECTRICAL

- Dual 120V/277V
- Charge rate/power “ON” LED indicator light and push to test switch for mandated code compliance testing
- Long-life, maintenance-free, rechargeable NiCd battery (EM models only)
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

HOUSING

- Premium grade Premium-grade, extruded aluminum housing
- Housing is easily detachable from below, providing accessibility for service or maintenance

WARRANTY & LISTINGS

- UL listed for damp locations (0°-50°C/32°F-122°F standard)
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes
- Meets city of Chicago requirements
- Five year warranty on all electronics and housing
- Batteries pro-rated for five years

ORDERING INFORMATION

M:	#FACES:	BC:	HC:	B:	O:
MODEL	# FACES	LETTER/ BACKGROUND COLOR	HOUSING COLOR	BATTERY	OPTIONS
ECARELZXTE	1 = SINGLE 2 = DOUBLE	RW = RED ON WHITE	A = ALUMINUM W = WHITE	BLANK = AC ONLY EM - NI-CD BATTERY	ENA = EXIT, no arrow ESWNA = STAIRS, no arrow EDA = EXIT, double arrow ESWDA = STAIRS, double arrow ERA ¹ = EXIT, right arrow ESWRA ¹ = STAIRS right arrow ELA ¹ = EXIT, left arrow ESWLA ¹ = STAIRS, left arrow ELARA ² = EXIT, left/right arrow ESWLARA ² = STAIRS, left/right arrow Notes: ¹ Available in single face configuration only ² Available in double face configuration only


07.2019



MOUNTING OPTIONS

- Drywall or drop-thru ceiling mount with hanger bars

DIMENSIONS

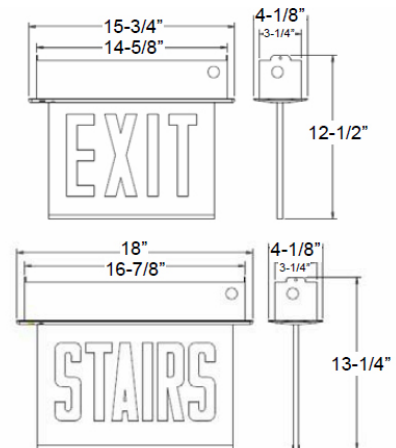

Electrical information

	Supply Voltage	Max. Watts	Max Amps
AC models	120V	4.3W	0.04A
AC models	277V	4.7W	0.02A
EM models	120V	4.5W	0.04A
EM models	277V	4.9W	0.02A