

VNGL40Q

Vandal Resistant Garage Lighter

HOUSING

Die cast aluminum housing, 1/2" coin plugs with o-rings for conduit & photocell on sides & back, textured architectural powdercoat finish over a chromate conversion coating.

LENS

Standard clear polycarbonate prismatic lens.

MOUNTING

Built-in template for mounting to an electrical box, or use 1/2" surface conduit, downrod, or quickmount bracket.

LED

Array lumens: 7805. Delivered lumens: 6338. CRI: 80+
 CCT: 5000K.
 Rated life: 50,000 hours. 5 year warranty.
 Aluminum boards.

WATTAGE

Array 53.7W, system 62.3W.

DRIVER

Electronic driver, 120-277V, 50/60Hz dimmable driver.

LISTING AND RATINGS


CSA: Listed for wet locations (damp locations when used with VNQM).

OPTIONS


2.5KV surge protection.
 Custom colors available upon request.



DIMENSIONS

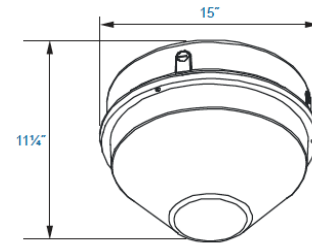

PHOTOMETRICS

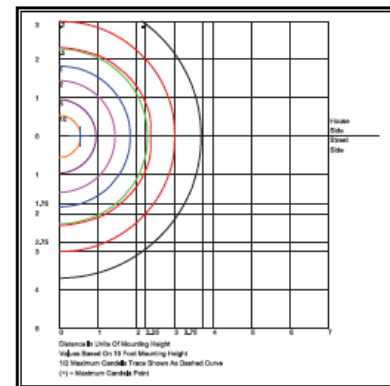

ORDERING INFORMATION

S:	O:	W:	B:	CCT:	L:	F:	O:
SERIES	OPTICS	WATTAGE	BALLAST	CCT	LENS	FINISH	OPTIONS
VNGL40	F - Medium beam spread	54 - 54W	U - 120-277V	5K - 5000K	S - Standard clear polycarbonate lens	Z - Bronze W - White	SF - Single fuse DF - Double fuse SP - Surge protection