

## ECXTEU

LED Exit & Incandescent Emergency Thermoplastic Combo



### Illumination

- Two fully adjustable 5.4W, glare-free lamp heads.
- Smooth thermoplastic reflector and plastic lens for optimal light distribution.
- Ultra bright, energy efficient, long life Red or Green LED EXIT sign illumination.

### Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

### Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.


### Warranty & Listings

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (20°C – 40°C).
- Certified to CEC under Title 20 Regulations.
- Meets CSA C22.2 No. 141-02 requirements for unit equipment.

### Options

- RC: Remote capacity of up to 11.0 watts.
- HTR: Optional internal heater for cold temperature (-9°C – 40°C) applications.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

### Dimensions

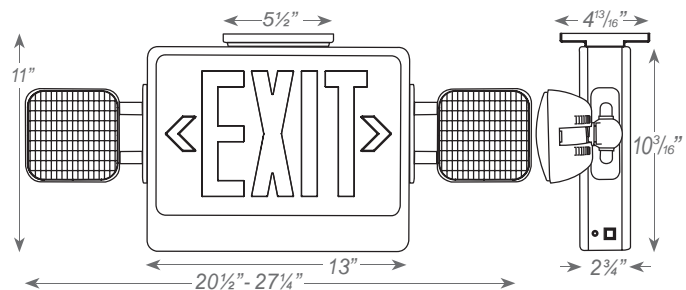

### Ordering Information

Product Number: ECXTEU

N:

LC:

HC:

O:

Special voltage & SALIDA face plate options available.

<sup>1</sup> Not available with RC units.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
ECXTEU	2	R Red G Green	W White B Black	RC Remote Capacity HTR Internal Heater <sup>1</sup> SDT Self-diagnostics USA Assembled in USA